


Implantation suivant A
 Implantation according to A
 Ansicht nach A

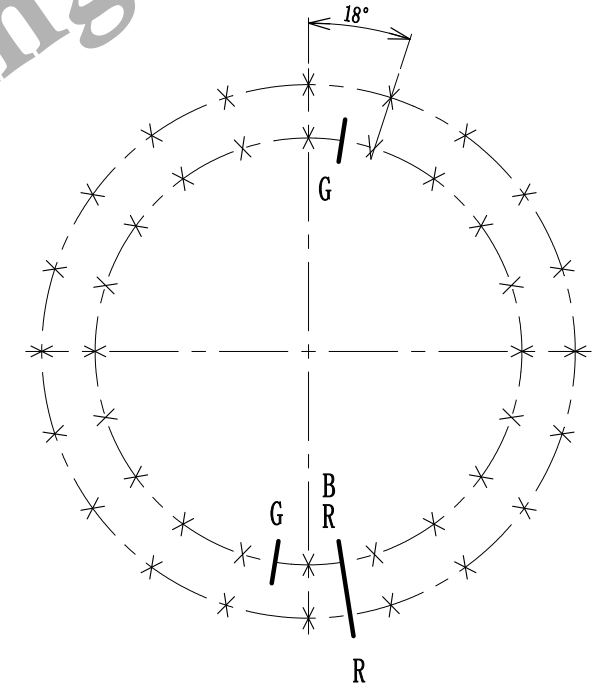

Sales Email: sales@jcb-bearing.com

Denture - Gear - Verzahnung Droite		Tolérances générales suivant IT-ETR-061 General tolerances according to IT-ETR-061 Allgemeine toleranzen nach IT-ETR-061				Masse estimée <u>4</u> kg Gewicht ca <u>4</u> lbs Estimated weight		N° <u>01-0422-01</u>	
Module <u>5</u> Angle de pression <u>20°</u> Module - Modul <u>5</u> Pressure angle <u>20°</u> Diametral pitch <u>103</u> Eingriffswinkel <u>0.50</u> Nr. of teeth - Zahnezahl <u>103</u> Troncature - Kopfkürzung Diamètre primitif <u>515</u> Pitch diameter - Teilkreissdurchmesser Départ 2 <u>5</u> d - Profilschiebung 2 <u>5</u> d Add. mod. 2 <u>12</u> dents <u>178.419</u> Cote sur <u>12</u> dents <u>178.269</u> Measurement on teeth Zahnmesstiefe bei Zähnen Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis		X B.E. 20 Trous de fixation $\varnothing 17.50$ eqnid. O.R. A.R. Mounting holes $\varnothing 17.50$ eqnis. Befestigungsböhrungen B.I. 20 Trous de fixation $\varnothing 17.50$ gl. Abst. I.R. A.R. Mounting holes $\varnothing 17.50$ eqnid. Befestigungsböhrungen G B.E. Trous de graisseurs eqnid. O.R. Grease holes eqnis. A.R. Schmierböhrungen B.I. 2 Trous de graisseurs <u>M 10 x 1.00</u> gl. Abst. I.R. Grease holes eqnid. Schmierböhrungen		Des. _____ Date. _____ Ver. _____ Date. _____ Ech. _____		Indice <u>A</u> Luoyang JCB Bearing Technology Co., Ltd Add: No. 285, Fenghua road, Luoyang, Henan, China. Postal: 471000 Phone: +86-379-68611678 Fax: +86-379-68611679 E-mail: sales@jcb-bearing.com			
Non trempée <u>0.31</u> No hardened Ungehärtet		B Position approximative du bouchon et du raccord de trempé R Filler plug and hardening connection of raceway ca Stopfen - und heerteschlupf - position							