

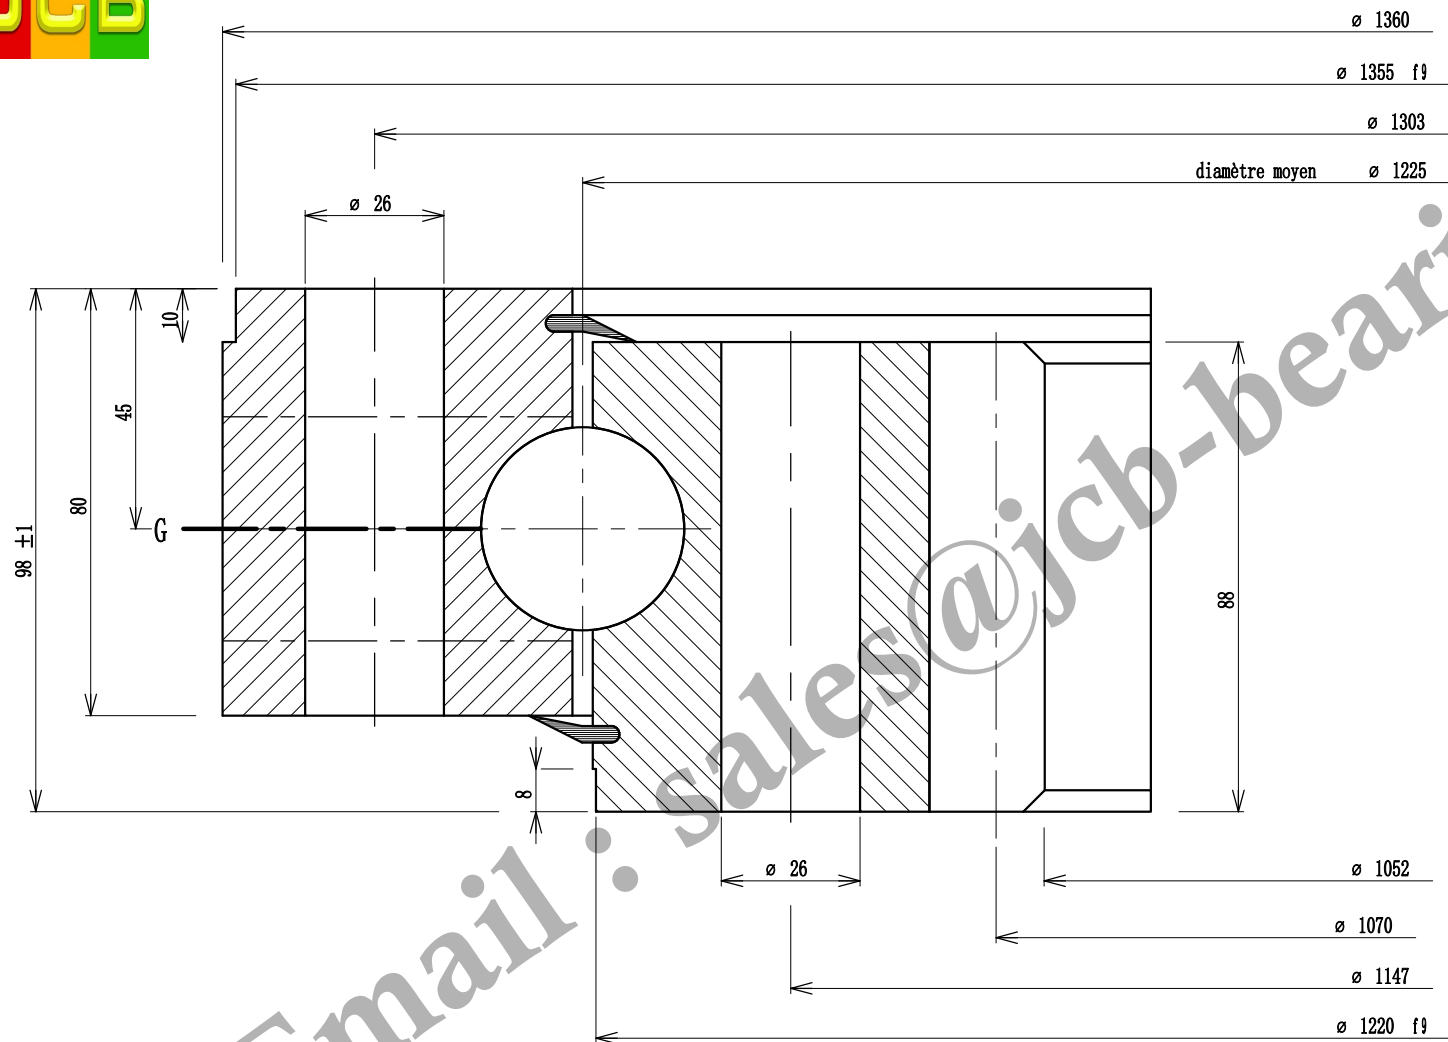


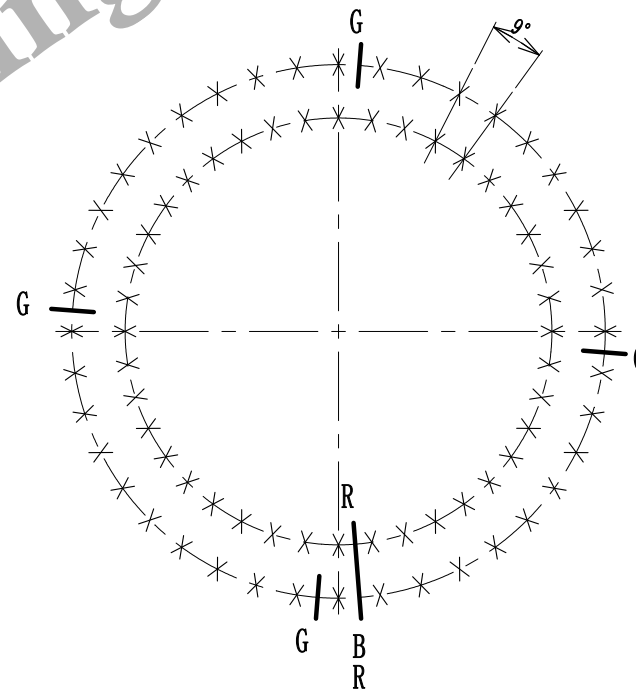

Implantation suivant A
Implantation according to A
Ansicht nach A



Sales Email:sales@jcb-bearing.com

Denture - Gear - Verzahnung Droite		Tolérances générales suivant IT-ETR-061 General tolerances according to IT-ETR-061 Allgemeine toleranzen nach IT-ETR-061						Masse estimée 326 kg Gewicht ca Estimated weight lbs	N° 02-1225-00			
Module 10	Angle de pression 20°	X	R.E. 40	Trous de fixation	ø 26	equiv.	Des. _____	Date. _____	Ver. _____	Date. _____	Ech. _____	Indice A
Module - Modul	Pressure angle		O.R.	Mounting holes		equiv.						
Diametral pitch	Eingriffswinkel		A.R.	Befestigungsbohrungen		gl. Abst.						
Nbr. de dents 106	Troncature											
Nr. of teeth - Zahnezahl	Troncature - Kopfkürzung	G	R.I. 40	Trous de fixation	ø 26	equiv.	Des. _____	Date. _____	Ver. _____	Date. _____	Ech. _____	Indice A
Diamètre primitif			I.R.	Mounting holes		equiv.						
Pitch diameter - Teilkreisdurchmesser			I.R.	Befestigungsbohrungen		gl. Abst.						
Import 2 m d 10												
Mod. 2 m d - Profilverschiebung 2 m d		B	R.E. 4	Trous de graisseurs	M 10 x 1.00	equiv.	Des. _____	Date. _____	Ver. _____	Date. _____	Ech. _____	Indice A
Cote sur 13 dents 388.089			O.R.	Grease holes		equiv.						
Measurement on teeth 387.789			A.R.	Schmierbohrungen		gl. Abst.						
Zahnessweite bei Zähnen												
Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis		R	R.I.	Trous de graisseurs		equiv.	Des. _____	Date. _____	Ver. _____	Date. _____	Ech. _____	Indice A
Non trempée 0.49			I.R.	Grease holes		equiv.						
Ungehartet			I.R.	Schmierbohrungen		gl. Abst.						
Hardened 0.64												
		B Position approximative du bouchon et du raccord de trempe Filler plug and hardening connection of raceway ca Stopfen - und heerteschlupf - position										Add: No. 285, Fenghua road, Luoyang, Henan, China. Postal: 471000 Phone: +86-379-68611678 Fax: +86-379-68611679 E-mail: sales@jcb-bearing.com