
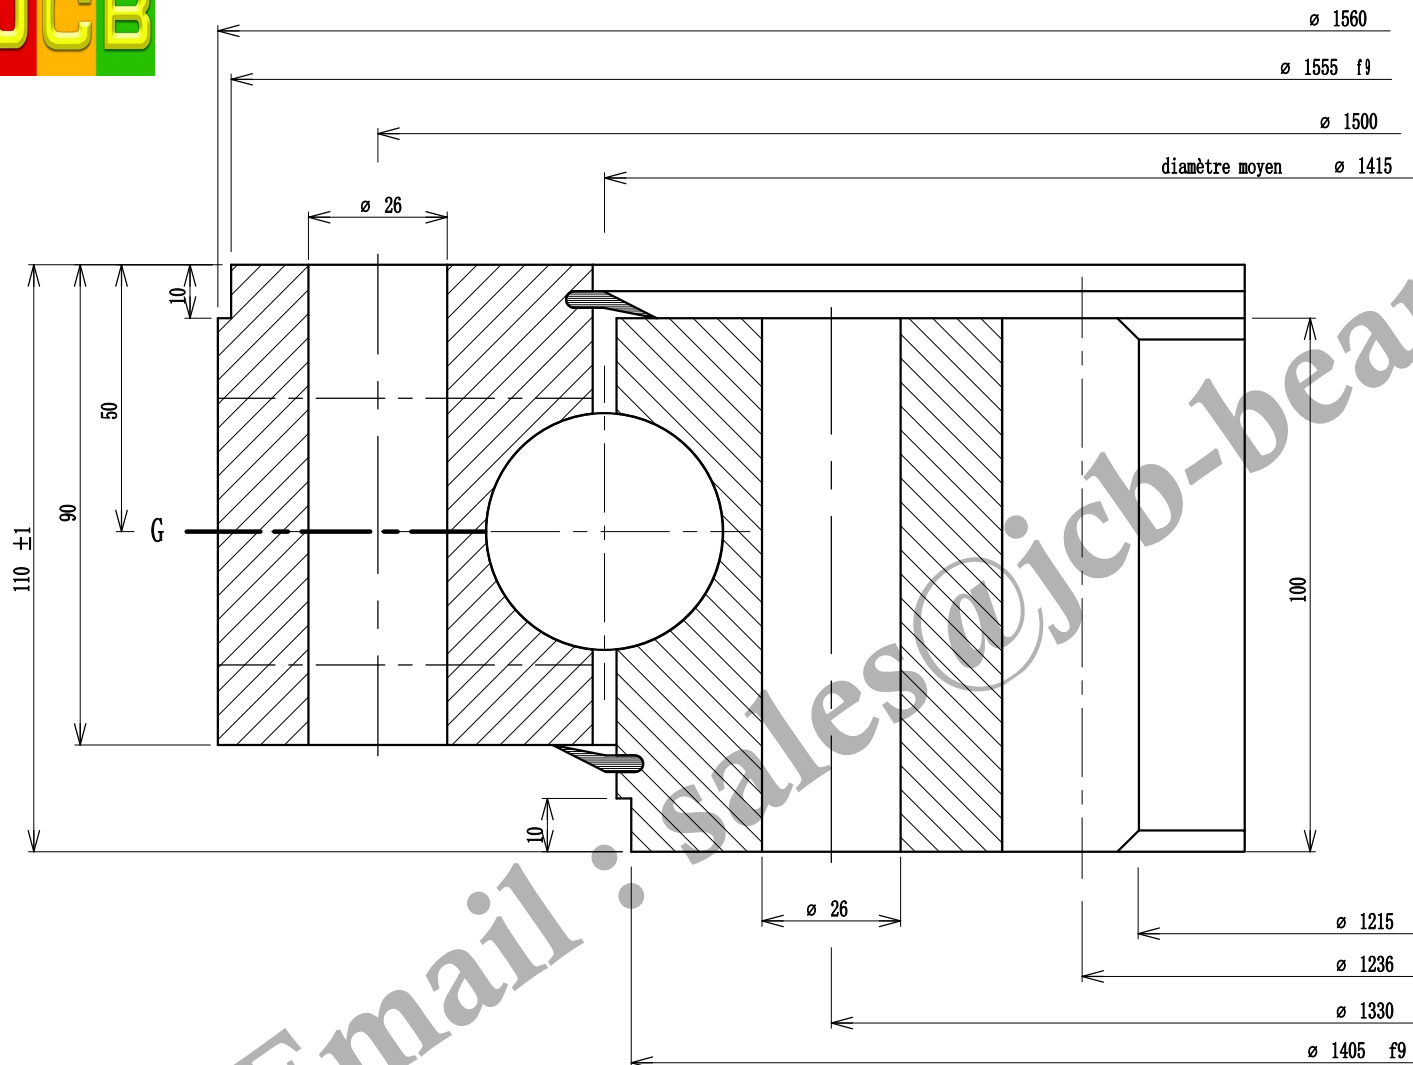


Implantation suivant A
Implantation according to A
Ansicht nach A

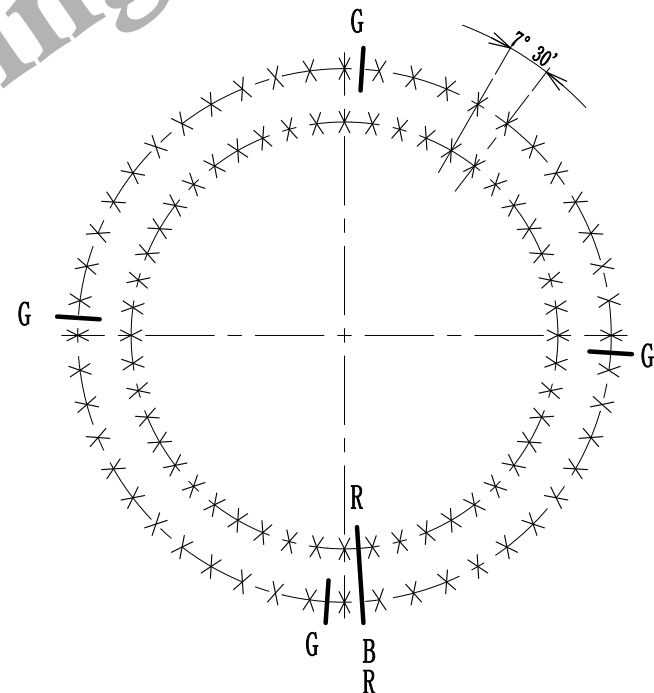

Sales Email:sales@jcb-bearing.com

Denture - Gear - Verzahnung Droite		Tolérances générales suivant IT-ETR-061 General tolerances according to IT-ETR-061 Allgemeine toleranzen nach IT-ETR-061						Masse estimée 498 kg Gewicht ca lbs Estimated weight		N° 02-1415-00	
Module 12	Angle de pression 20°	X	R.E. 48	Trous de fixation	ø 26	equiv.	Des. _____ Date. _____ Ver. _____ Date. _____ Ech. _____			Indice A	Luoyang JCB Bearing Technology Co., Ltd Add: No. 285, Fenghua road, Luoyang, Henan, China. Postal: 471000 Phone: +86-379-88611678 Fax: +86-379-88611679 E-mail: sales@jcb-bearing.com
Module - Modul	Pressure angle		A.R.	Mounting holes		equiv.					
Diametral pitch 1.50	Engriffswinkel		B.I. 48	Trous de fixation	ø 26	equiv.					
Nbr. of teeth - Zahnezahl 102	Troncature		I.R.	Mounting holes		equiv.					
Diamètre primitif 1224	Troncature - Kopfkürzung	G	R.E. 4	Trous de graisseurs	M 10 x 1.00	equiv.					
Pitch diameter - Teilkreisdurchmesser			O.R.	Grease holes		equiv.					
Modul 2 m d 12	Profilverschiebung 2 m d		A.R.	Schmierbohrungen		equiv.					
Cote sur 12 dents 429.605			B.I.	Trous de graisseurs		equiv.					
Measurement on teeth 429.245			I.R.	Grease holes		equiv.					
Zahnessweite bei Zähnen				Schmierbohrungen		equiv.					
Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis			B	Position approximative du bouchon et du raccord de trempe							
Non trempée 0.53	Trempée 0.68		R	Filler plug and hardening connection of raceway ca Stopfen - und heerteschlupf - position							