

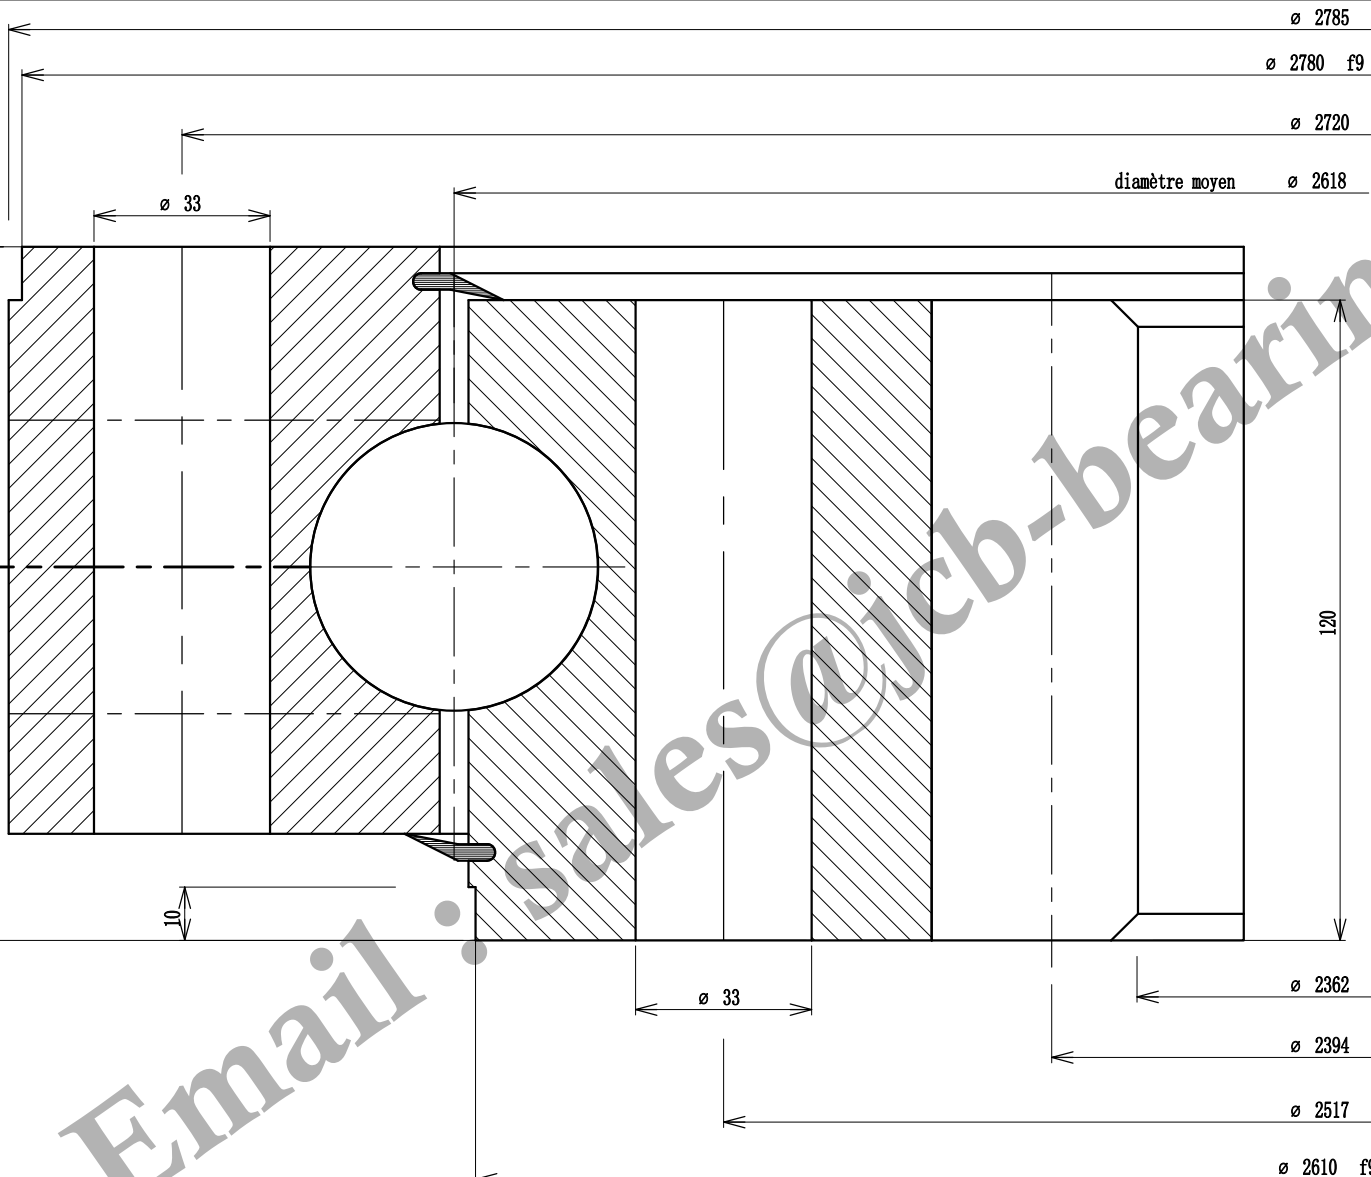
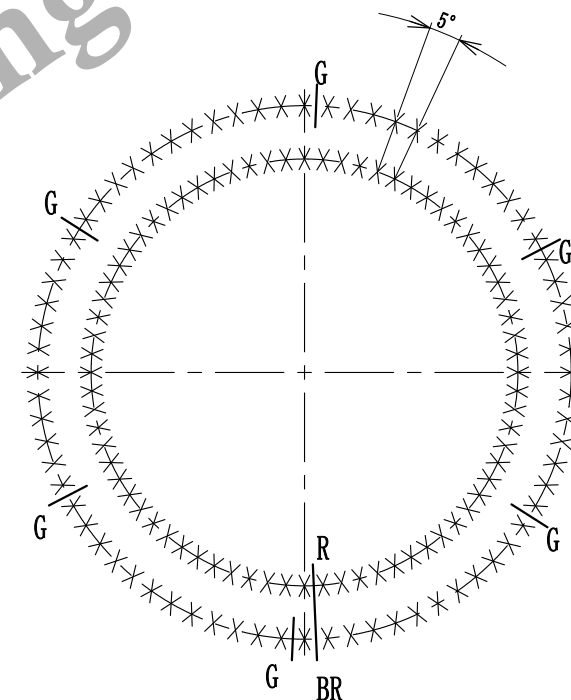




Implantation suivant A
Implantation according to A
Ansicht nach A



Sales Email:sales@jcb-bearing.com

Denture - Gear - Verzahnung Droite		Tolérances générales suivant IT-ETR-061 General tolerances according to IT-ETR-061 Allgemeine Toleranzen nach IT-ETR-061						Masse estimée 1394 kg Gewicht ca. lbs Estimated weight		N° 02-2618-00	
Module 18 Module - Modul Diametral pitch 2 Nr. of teeth - Zahnzahl Diamètre primitif 2376 Pitch diameter - Teilkreissdurchmesser Mount 2 m d 18 Add. mod. 2 m d - Profilveränderung 2 m d Cote sur 15 dents 811.079 Measurement on teeth 810.539 Zahnmassweite bei Zähnen		Angle de pression 20° Pressure angle Eingriffswinkel Troncature Truncature - Kopfkürzung 2376		X B.E. 72 Trous de fixation M30Lamés Ø 33 ^{mid} O.R. Mounting holes eqs. A.R. Befestigungsboreungen gl. Abst. B.I. 72 Trous de fixation M30Lamés Ø 33 ^{mid} I.R. Mounting holes eqs. I.R. Befestigungsboreungen gl. Abst. G B.E. 6 Trous de graisseurs M 10 x 1.00 O.R. Grease holes eqs. A.R. Schmierboreungen gl. Abst. B.I. Trous de graisseurs eqs. I.R. Grease holes gl. Abst. I.R. Schmierboreungen		Des. Date. Ver. Date. Ech.				Indice A	
Non trempée No hardened Ungelhartet 0.71		Trempée Hardened Gehartet 0.91		B Position approximative du bouchon et du raccord de trempée Filler plug and hardening connection of raceway ca Stopfen - und heerteschlupf - position						Add: No. 285, Fenghua road, Luoyang, Henan, China. Postal: 471000 Phone: +86-379-68611678 Fax: +86-379-68611679 E-mail: sales@jcb-bearing.com	