



- ø 1770
- ø 1760 f9
- ø 1710
- Diamètre moyen ø 1606



Implantation suivant A
 Implantation according to A
 Ansicht nach A

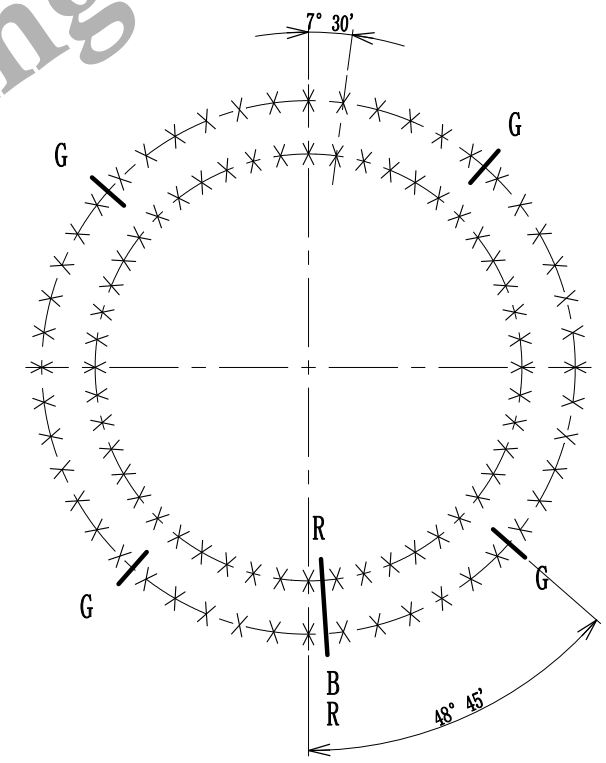

Sales Email: sales@jcb-bearing.com

Denture - Gear - Verzahnung	
Droite	
Module 14	Angle de pression 20°
Module - Modul	Pressure angle
Diametral pitch	Eingriffswinkel 1.50
Nr. of teeth - Zahnezahl 100	Troncature
Diamètre primitif 1400	Troncature - Kopfkürzung
Pitch diameter - Teilkreissdurchmesser	
Dept 2 m d	d - Profilschiebung 2 m d
Add. mod. 2 m d	
Cote sur 12 dents 496.021	
Measurement on teeth 496.601	
Zahnmesstiefe bei Zähnen	
Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis	
Non trempée 0.57	Tempée 0.77
No hardened	Hardened
Ungehärtet	Gehärtet

Tolérances générales suivant IT-ETR-061 General tolerances according to IT-ETR-061 Allgemeine toleranzen nach IT-ETR-061			
X	R.E.	48	Trous de fixation ø 30 equid.
	O.R.		Mounting holes equis.
	A.R.		Befestigungsborungen gl. Abst.
	B.I.	48	Trous de fixation ø 30 equid.
	I.R.		Mounting holes equis.
	L.R.		Befestigungsborungen gl. Abst.
G	R.E.	4	Trous de graisseurs M 10 x 1.00 equid.
	O.R.		Grease holes equis.
	A.R.		Schmierborungen Lamés ø 20 prof. 12 gl. Abst.
	B.I.		Trous de graisseurs equid.
	I.R.		Grease holes equis.
	L.R.		Schmierborungen gl. Abst.
B Position approximative du bouchon et du raccord de trémie Filler plug and hardening connection of raceway ca Stopfen - und heerteschlupf - position			

	Des. _____
	Date. _____
	Ver. _____
	Date. _____
	Ech. _____

Masse estimée 800 kg	N° 07-1606-02
Gewicht ca _____ lbs	
Indice B	

Luoyang JCB Bearing Technology Co., Ltd

Add: No. 285, Fenghua road, Luoyang, Henan, China.
 Postal: 471000
 Phone: +86-379-68611678
 Fax: +86-379-68611679
 E-mail: sales@jcb-bearing.com