




ø 2002


ø 2000 f9

ø 1940

Diamètre moyen ø 1830

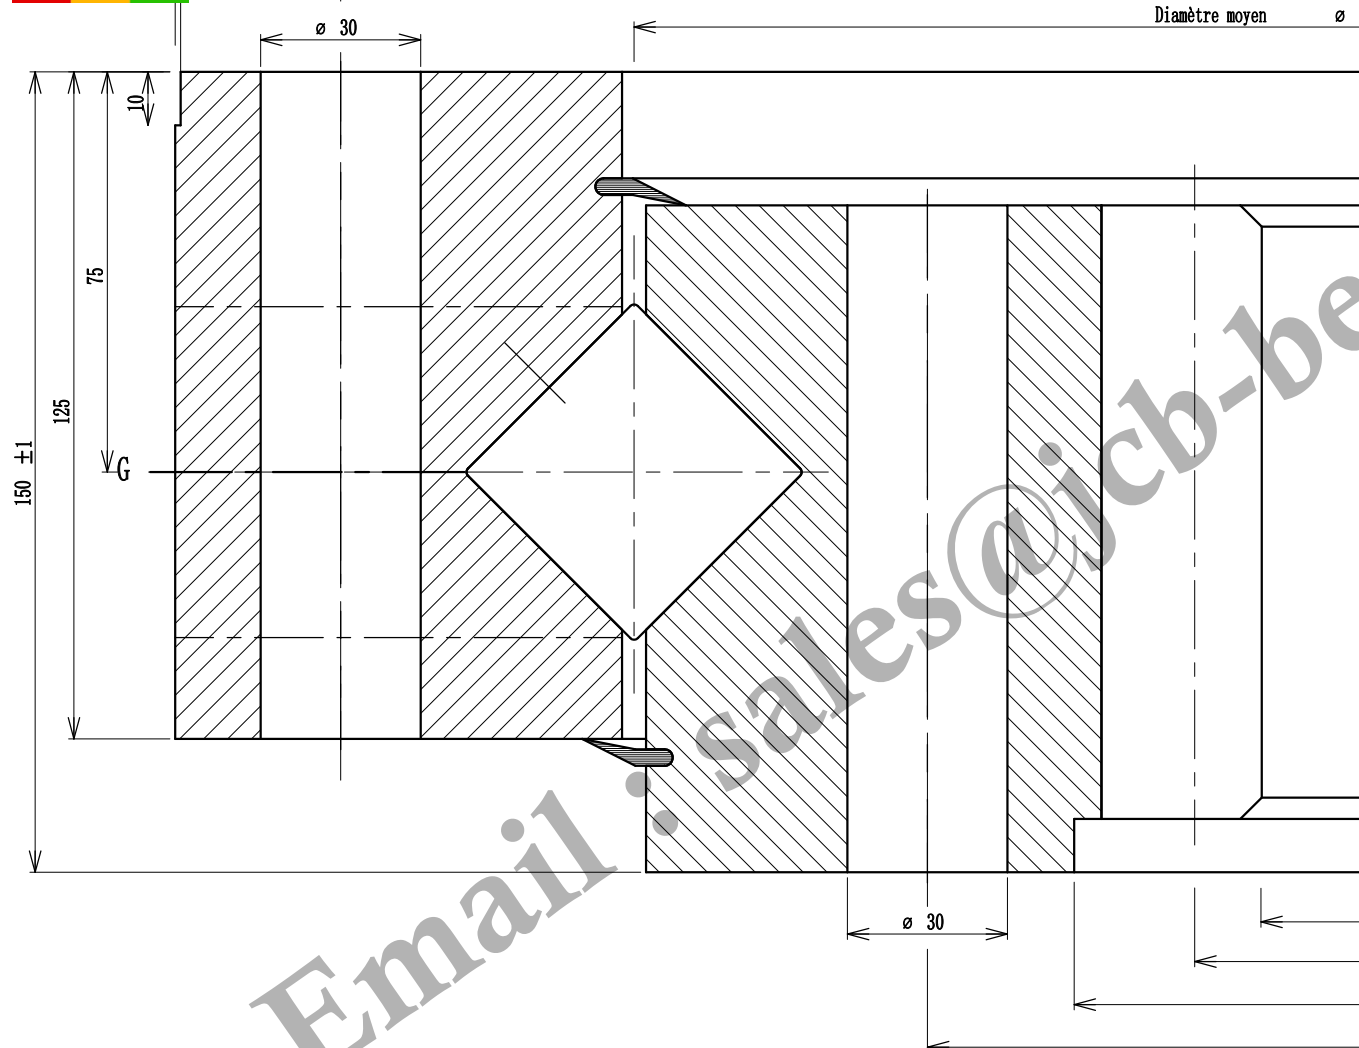

Implantation suivant A
Implantation according to A
Ansicht nach A

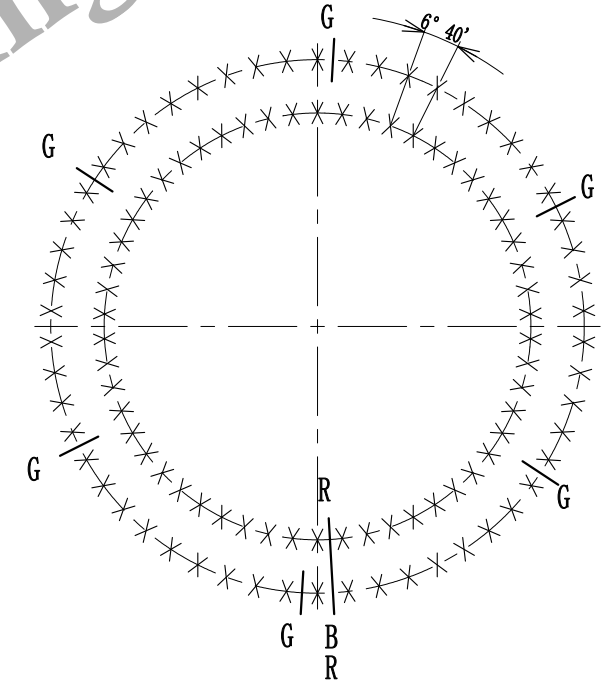

Sales Email: sales@jcb-bearing.com

Denture - Gear - Verzahnung	
Droite	
Module 14	Angle de pression 20°
Module - Modul	Pressure angle
Diametral pitch 115	Engriffswinkel 1.60
Nr. of teeth - Zahnezahl	Troncature
Diamètre primitif 1610	Troncature - Kopfkürzung
Pitch diameter - Teilkreissdurchmesser	
Depart 2 m d 9.80	
Add. mod. 2 m d - Profilsverschiebung 2 m d	
Cote sur 14 dents 584.996	
Measurement on teeth 584.576	
Zahnessweite bei Zähnen	
Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis	
Non trempée 0.59	Tempée Hardened Gehärtet 0.79

Tolérances générales suivant IT-ETR-061 General tolerances according to IT-ETR-061 Allgemeine toleranzen nach IT-ETR-061						
X	R.E. O.R. A.R.	54	Trous de fixation Mounting holes Befestigungsböhrungen	ø 30	equid. equiv.	
	R.I. I.R.	54	Trous de fixation Mounting holes Befestigungsböhrungen	ø 30	gl. Abst.	
	R.E. O.R. A.R.	6	Trous de graisseurs Grease holes Schmierböhrungen	M 10 x 1.00	gl. Abst.	
	R.I. I.R.		Trous de graisseurs Grease holes Schmierböhrungen		gl. Abst.	
	G	R.E. O.R. A.R.		Trous de fixation Mounting holes Befestigungsböhrungen		gl. Abst.
		R.I. I.R.		Trous de fixation Mounting holes Befestigungsböhrungen		gl. Abst.
B Position approximative du bouchon et du raccord de trempé Fillet plug and hardening connection of raceway ca Stopfen - und heerteschlupf - position						

Des.	
Date.	
Ver.	
Date.	
Ech.	

Masse estimée Gewicht ca Estimated weight	951 kg lbs
N°	07-1830-04
Indice	A
Luoyang JCB Bearing Technology Co., Ltd Add: No. 285, Fenghua road, Luoyang, Henan, China. Postal: 471000 Phone: +86-379-68611678 Fax: +86-379-68611679 E-mail: sales@jcb-bearing.com	