



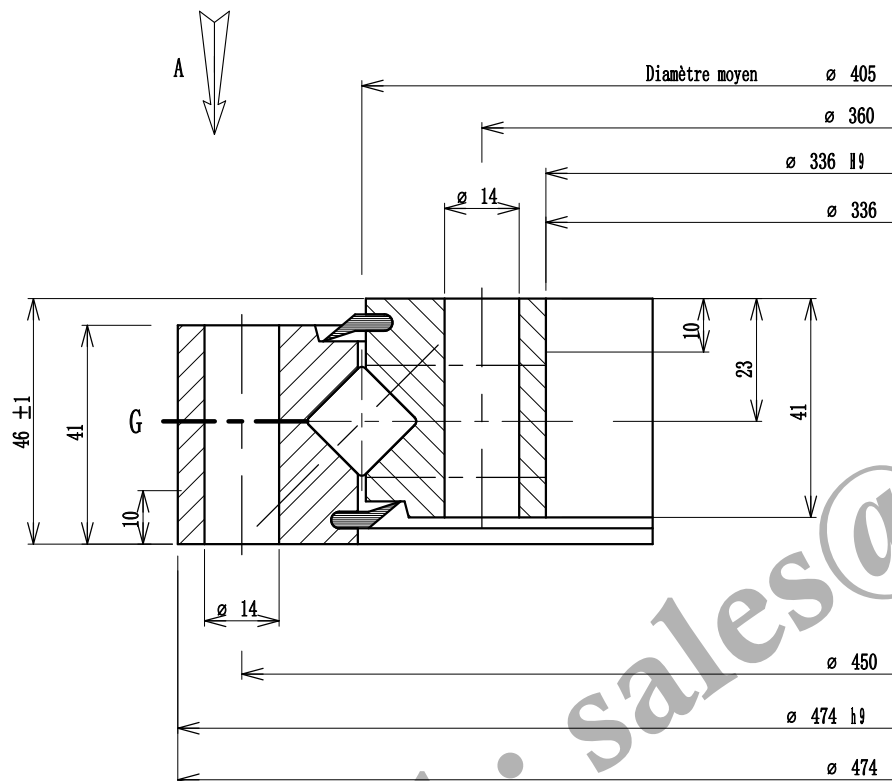

Implantation suivant A
Implantation according to A
Ansicht nach A

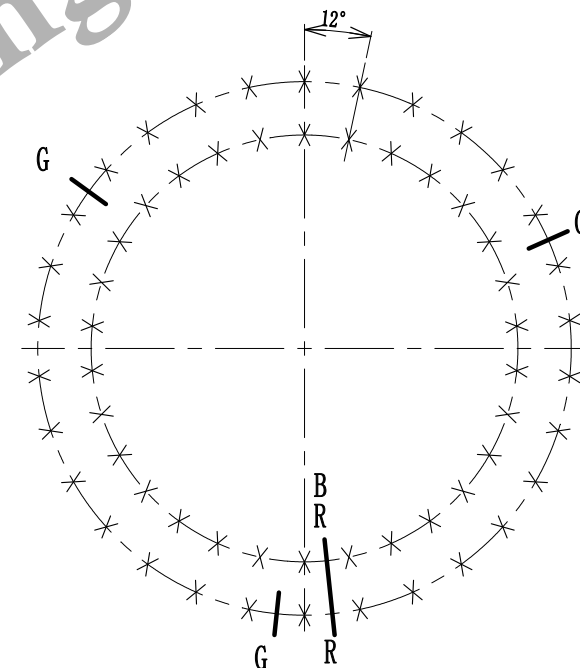

Sales Email:sales@jcb-bearing.com

Denture - Gear - Verzahnung		Tolérances générales suivant IT-ETR-061 et ISO 8015 General tolerances according to IT-ETR-061 and ISO 8015 Allgemeine toleranzen nach IT-ETR-061 und ISO 8015						Masse estimée $\frac{1}{2}$ kg Gewicht ca lbs Estimated weight		N° 08-0405-05	
Module Module - Modul Diametral pitch Nr. of teeth - Zahnezahl Diamètre primitif Pitch diameter - Teilkreissdurchmesser Départ 2 m d Add. mod. 2 m d - Profilverschiebung 2 m d Cote sur dents Measurement on teeth Zahnmassweite bei Zähnen Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis	Angle de pression Pressure angle Eingriffswinkel Troncature Truncature - Kopfkürzung	X	R.E. 30	Trous de fixation Mounting holes Befestigungsboreungen	$\varnothing 14$	equiv. equiv.		Des. _____ Date. _____ Ver. _____ Date. _____ Ech. _____		Indice A	Luoyang JCB Bearing Technology Co., Ltd Add: No. 285, Fenghua road, Luoyang, Henan, China. Postal: 471000 Phone: +86-379-68611678 Fax: +86-379-68611679 E-mail: sales@jcb-bearing.com
			R.I. 30	Trous de fixation Mounting holes Befestigungsboreungen	$\varnothing 14$	gl. Abst. equiv.					
			R.E. 3	Trous de graisseurs Grease holes Schmierbohrungen	M 10 x 1.00	gl. Abst. equiv.					
			R.I. 3	Trous de graisseurs Grease holes Schmierbohrungen		gl. Abst. equiv.					
Non trempée No hardened Ungehärtet	Trémpée Hardened Gehärtet	B	Position approximative du bouchon et du raccord de trempe Filler plug and hardening connection of raceway ca Stopfen - und heerteschlupf - position								