


Implantation suivant A
 Implantation according to A
 Ansicht nach A

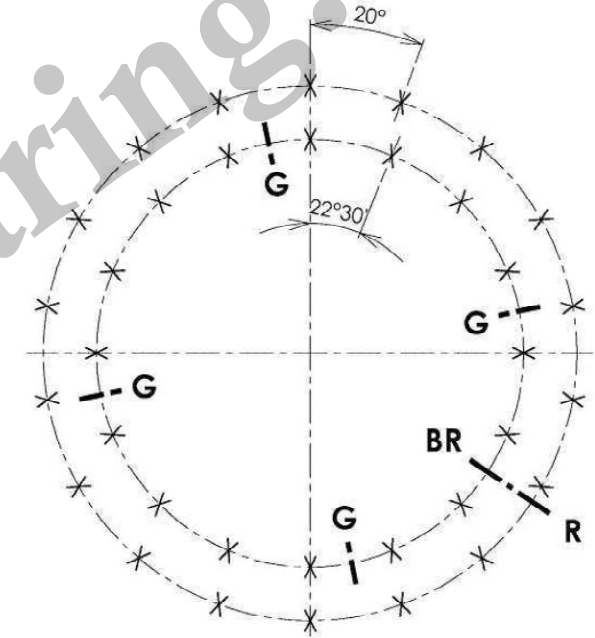

Denture - Gear - Verzahnung Droite Module - Modul 6 Diametral pitch 138 Nbr. of teeth - Zahnzahl 138 Troncature - Koptkurzung 828 Diamètre primitif - Teilkreissdurchmesser 828 Déport 26 m Add. mod. 26 m - Profilverchiebung 26 m Cote sur 16 dents 286.020 Measurement on teeth 285.840 Zahnmessweite bei Zähnen Faux rond au diamètre primitif - Run out on P.D. Rundlauffehler am Teilkreis		Tolérances générales suivant IT-ETR-061 General tolerances according to IT-ETR-061 Allgemeine toleranzen nach IT-ETR-061		<table border="1"> <tr> <td>B.E. O.R. A.R.</td> <td>18</td> <td>Trous de fixation Mounting holes Befestigungsboreungen</td> <td>M12</td> <td>equiv. equis.</td> <td>gl. Abst.</td> </tr> <tr> <td>B.I. F.R. J.R.</td> <td>16</td> <td>Trous de fixation Mounting holes Befestigungsboreungen</td> <td>Ø 18</td> <td>equiv. equis.</td> <td>gl. Abst.</td> </tr> <tr> <td>B.E. O.R. A.R.</td> <td></td> <td>Trous de graisseurs Grease holes Schmierbohrungen</td> <td></td> <td>equiv. equis.</td> <td>gl. Abst.</td> </tr> <tr> <td>B.I. I.R. J.R.</td> <td>4</td> <td>Trous de graisseurs Grease holes Schmierbohrungen</td> <td>M 8 x 1.00</td> <td>equiv. equis.</td> <td>gl. Abst.</td> </tr> </table>		B.E. O.R. A.R.	18	Trous de fixation Mounting holes Befestigungsboreungen	M12	equiv. equis.	gl. Abst.	B.I. F.R. J.R.	16	Trous de fixation Mounting holes Befestigungsboreungen	Ø 18	equiv. equis.	gl. Abst.	B.E. O.R. A.R.		Trous de graisseurs Grease holes Schmierbohrungen		equiv. equis.	gl. Abst.	B.I. I.R. J.R.	4	Trous de graisseurs Grease holes Schmierbohrungen	M 8 x 1.00	equiv. equis.	gl. Abst.	 Masse estimée 58 kg Gewicht ca 105 lbs Estimated weight		N° 21-0741-01 Indice C Company Name : Luoyang JCB Bearing Technology Co.,Ltd Contact information Company Address : No. 3 Lianmeng road, Luoyang, Henan.China. Postal code : 471003 Phone : 86-379-68611678 Fax : 86-379-68611679 Msn: jcb-bearing@hotmail.com Skype: jcb-bearing E-mail: sales@jcb-bearing.com Reserved E-mail: jcb-bearing@gmail.com Website: www.jcb-bearing.com	
B.E. O.R. A.R.	18	Trous de fixation Mounting holes Befestigungsboreungen	M12	equiv. equis.	gl. Abst.																												
B.I. F.R. J.R.	16	Trous de fixation Mounting holes Befestigungsboreungen	Ø 18	equiv. equis.	gl. Abst.																												
B.E. O.R. A.R.		Trous de graisseurs Grease holes Schmierbohrungen		equiv. equis.	gl. Abst.																												
B.I. I.R. J.R.	4	Trous de graisseurs Grease holes Schmierbohrungen	M 8 x 1.00	equiv. equis.	gl. Abst.																												
Non trempée No hardened Ungehärtet		Trempée Hardened Gehärtet		B Position approximative du bouchon et du raccord de trempage Filler plug and hardening connection of raceway ca Stopfen- und heerteschlupf-position R		C B A Ind		Des. _____ Date. _____ Ver. _____ Date. _____ Ech. _____																									