


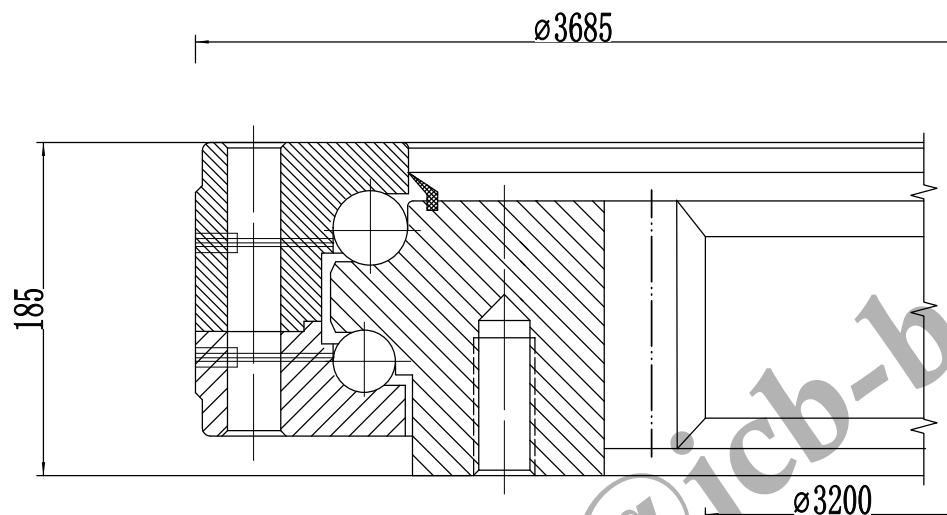

1 Axial clearance:min , max ;
2 After assembled C side make mark : and manufacture No.

www.slewing-ring-bearings.com

[illegible]